

ES1523RT

This fully electric rough terrain scissor lift ensures greater jobsite versatility.

It is equipped as standard with 4WD and rough terrain solid non-marking tyres. The stabilisers are automatic and ensure stability when working at height.



ZERO EMISSIONS

STANDARD EQUIPMENTS:

- Automatic stabilizers to work at height
- Standard oscillating axle
- Self-locking door on the platform
- Platform load sense system
- Automatic braking system
- Tilt indicator with alarm
- Warning siren during lowering and dual flashing LED light
- Horn
- Emergency stop button
- Anchoring eyebolts
- Onboard diagnostics system
- Hour counter
- Proportional controls
- Fold-down guardrails
- Explosion-proof tubing system
- Motion Alarm
- Tie-down and lifting points
- Dual slide-out platform extension deck
- 2 Wheels Steering
- Four-wheel drive
- Self-weight lowering system
- Emergency pump
- Manual emergency brake release
- Hydraulic oil cooling system

MAIN APPLICATIONS



Maintenance



Plant Service



Construction



Distribution/
Logistics






Large events

ES1523RT

	Load capacity	680 kg
	Load capacity on extended platform	227 kg
	Max no. occupants	7
A	Working height	15 m
B	Platform floor height	13 m
C	Overall length (with outriggers)	4.88 m
D	Overall width	2.33 m
E	Overall height (rails up)	3.02 m
F	Transport height (rails down)	2.26 m
	Platform size (length/width)	3,98x1.83 m
H G	Platform extension size	1.43 m / 1.16 m
	Ground clearance	30 cm
I	Wheelbase	2.86 m
	Turning radius (inside/outside)	2.35 m / 5.2 m
	Engine	-
	Drive motor	32VAC/9kW
	Lifting motor	32VAC/15kW
	Travel speed (stowed)	6.0 km/h
	Travel speed (raised)	1.0 km/h
	Gradeability	40%
	Maximum working slope	2°/3°
	Batteries	2x48 V/450 Ah
	Integrated charger	48 V / 60 A
	Hydraulic tank	120 l
	Diesel tank	-
	Tyres	315/55/D20
	Weight (with outriggers)	8,340 kg

STANDARDS COMPLIANCE:
EN 280, ANSI/SAIA A92.20

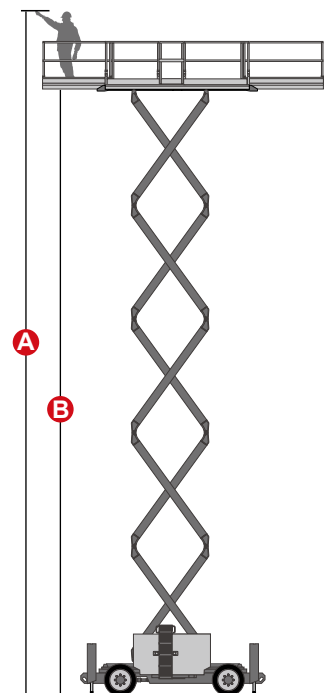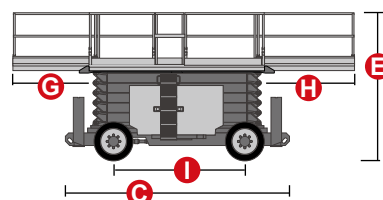

Automatic stabilizers